

NEON

TILE

Artistic
touch



DIGITAL
VITRIFIED TILES

600X1200MM

CREYON
SERIES



about us

NEON TILE LLP is one of the leading of all type ceramic tile Wall tiles providing an extensive range of tile decor options for both residential and commercial interiors.

We believe in values of - "innovation, Quality Products and Customer Satisfaction".

Product Range: Digital Vitrified Tiles


These offered range of tiles find applications in Residential & Commercial complexes, IT Parks, Hotels & Restaurants, Airports, Hospitals as well as other housing constructions and restoration of existing structures.

Backed with advanced & sophisticated state-of-the-art infrastructure facility, we are well-equipped with latest designing & manufacturing amenities. This also facilitates us in persistently improving every aspect of our operations.

Further, we lay prime emphasis on the human factors occupied in our business.



ALASKA WHITE

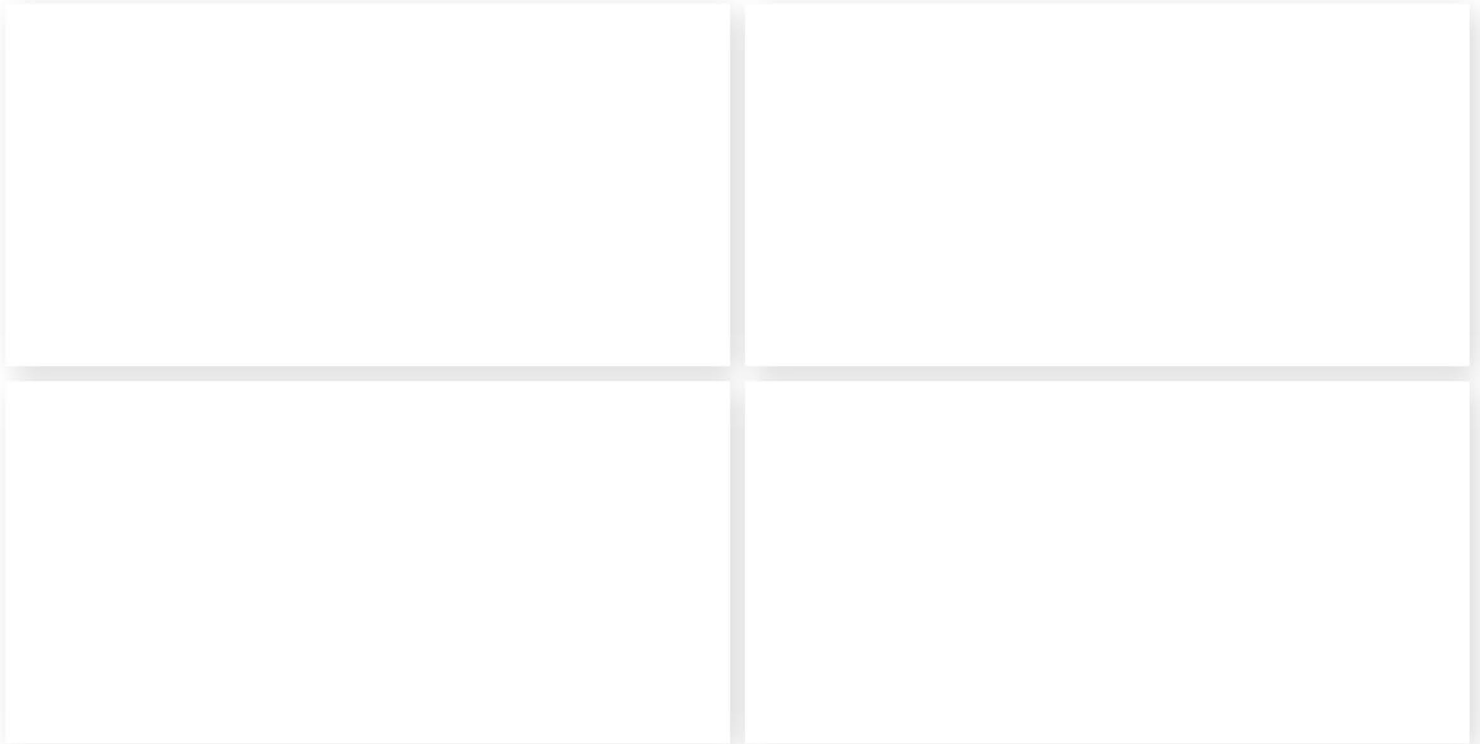


Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

AQUA

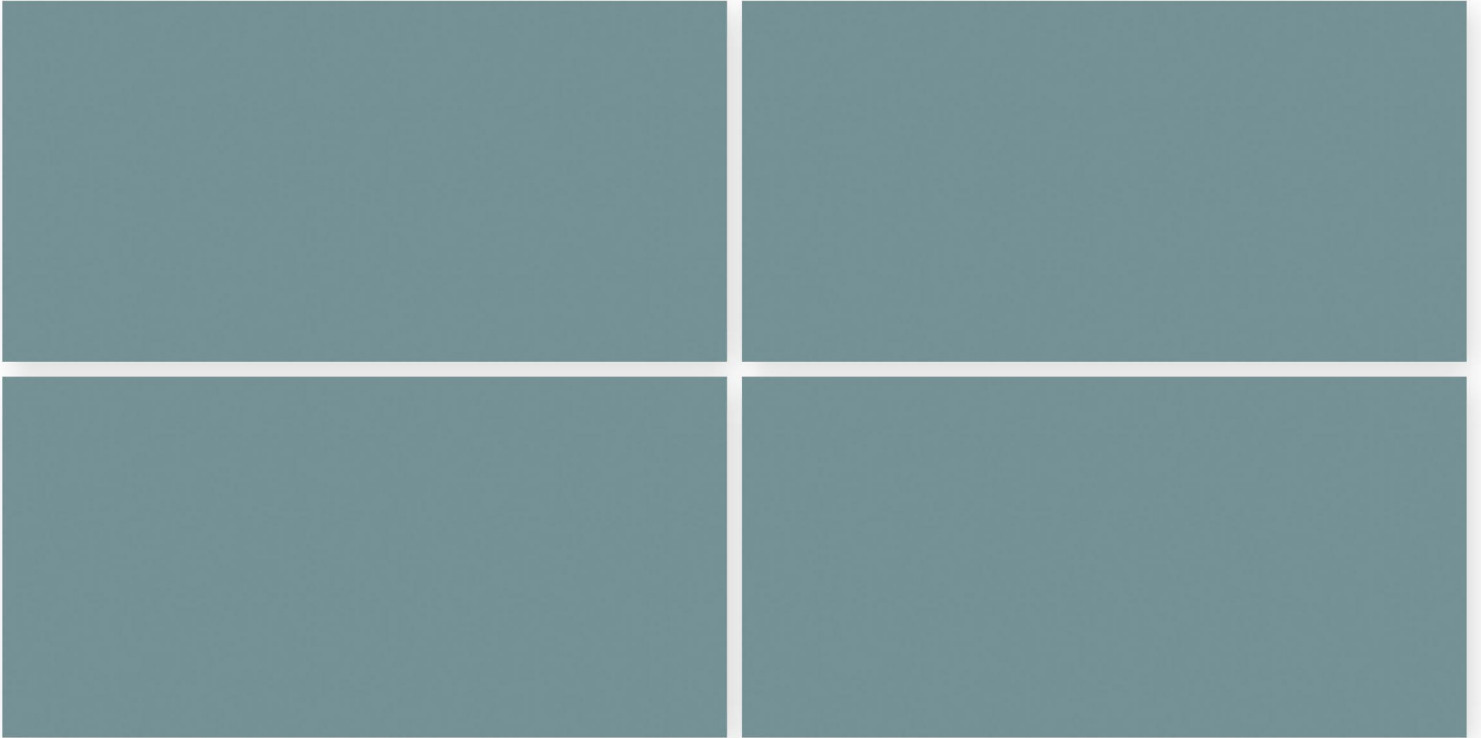


Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

COBAT BLUE

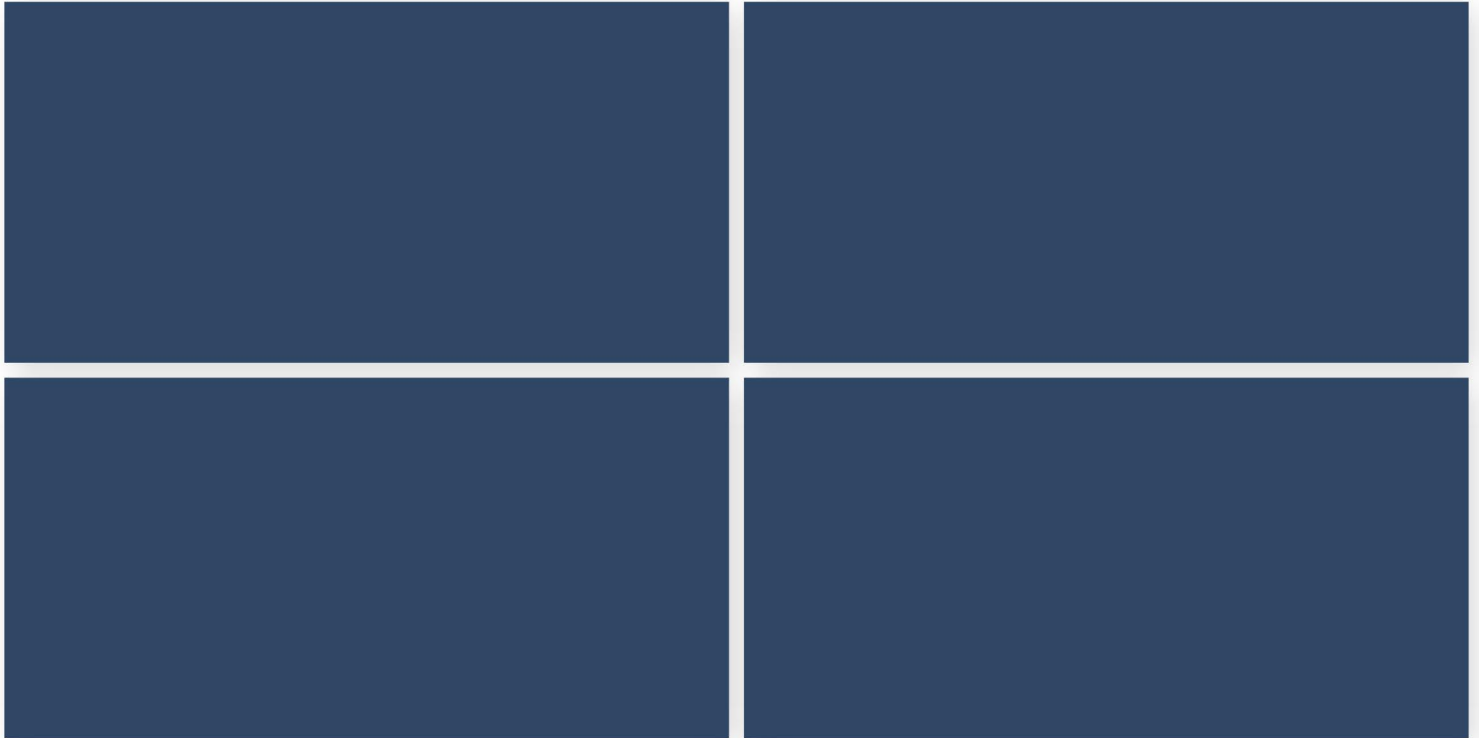


Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

GREEN

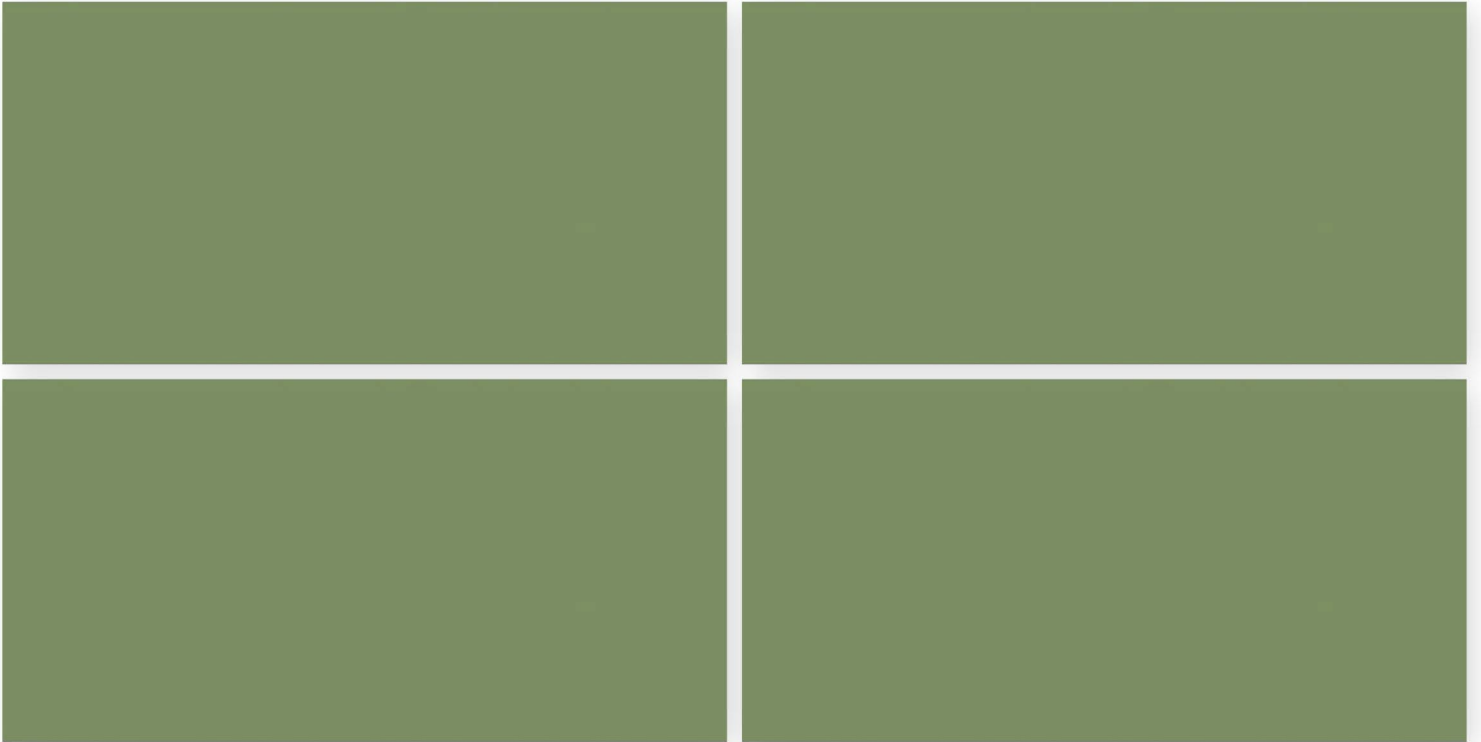


Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

GREY

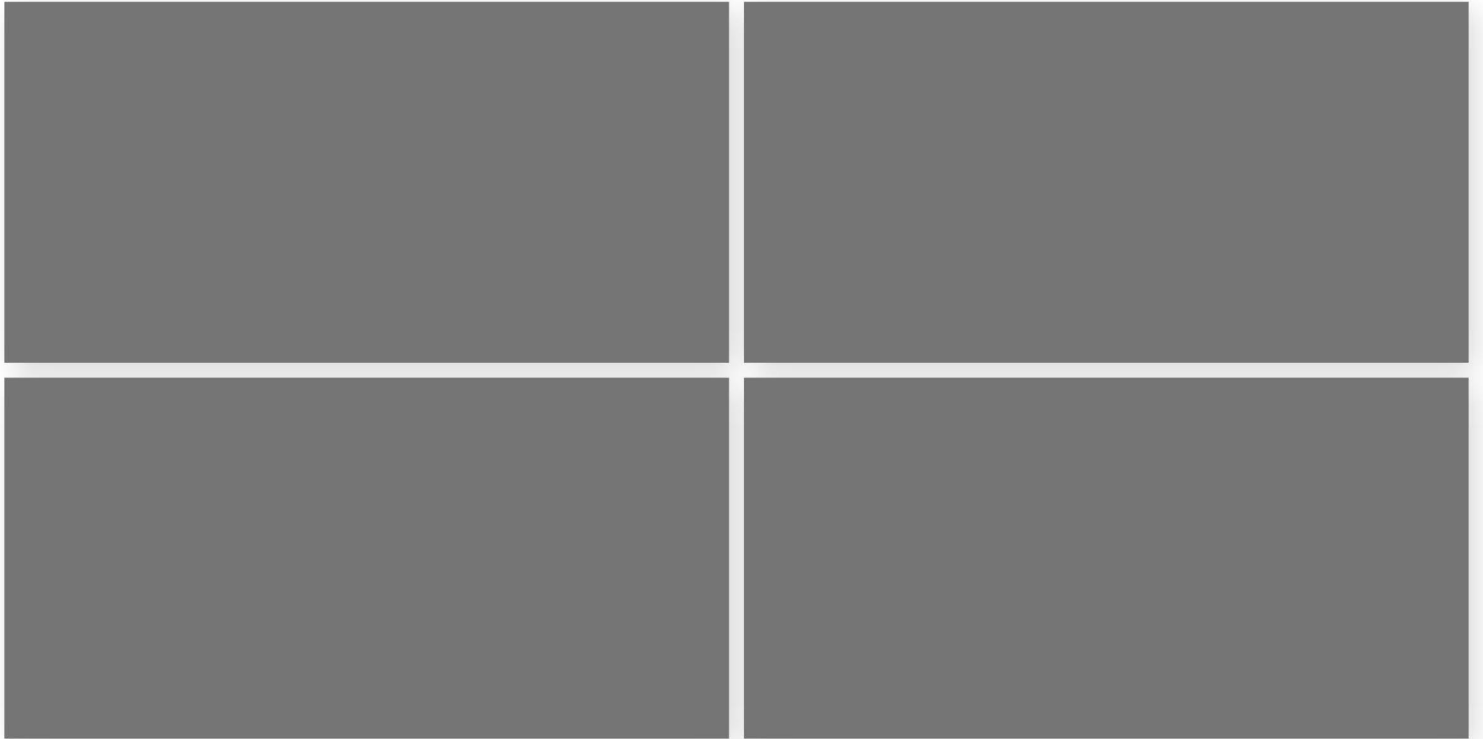


Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

IVORY

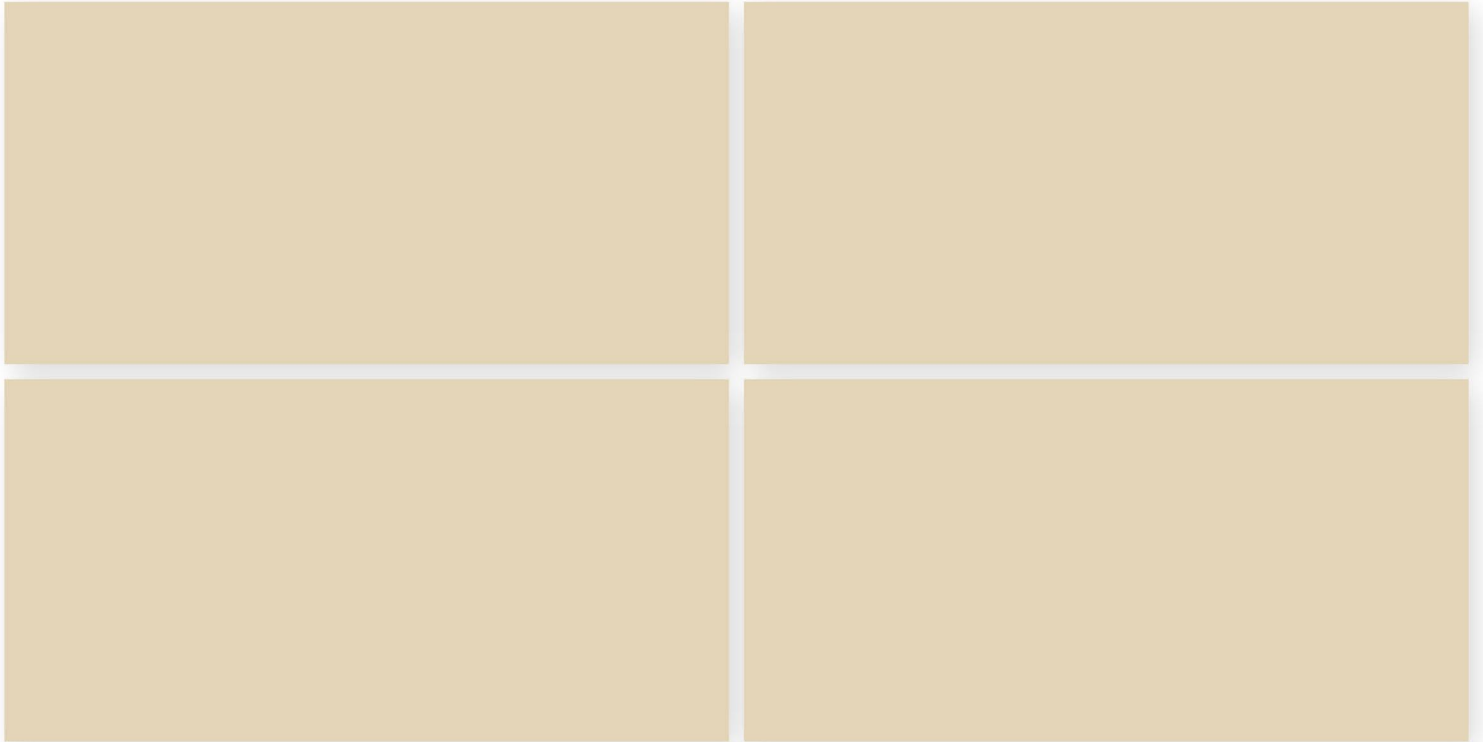


Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

JAISALMER

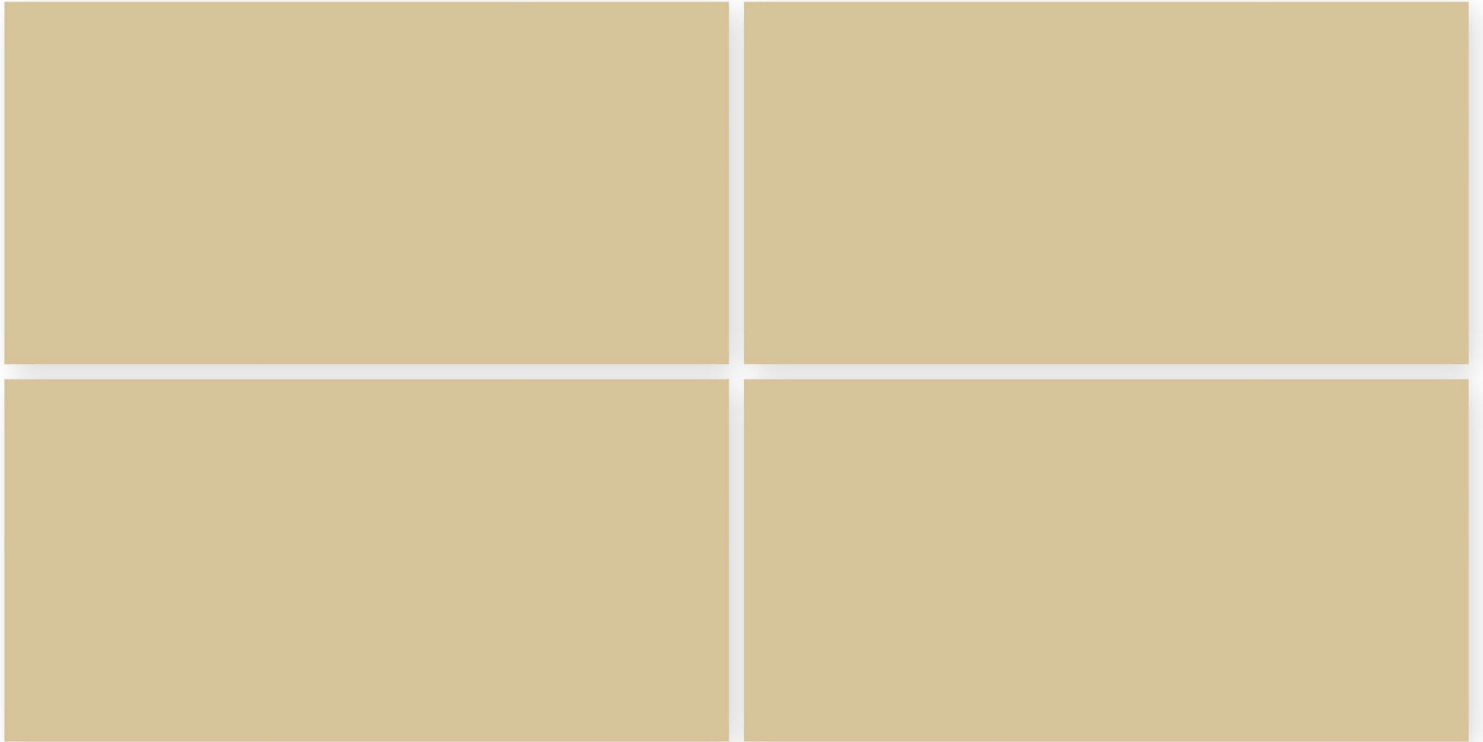

Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

PINK




Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

SKY BLUE

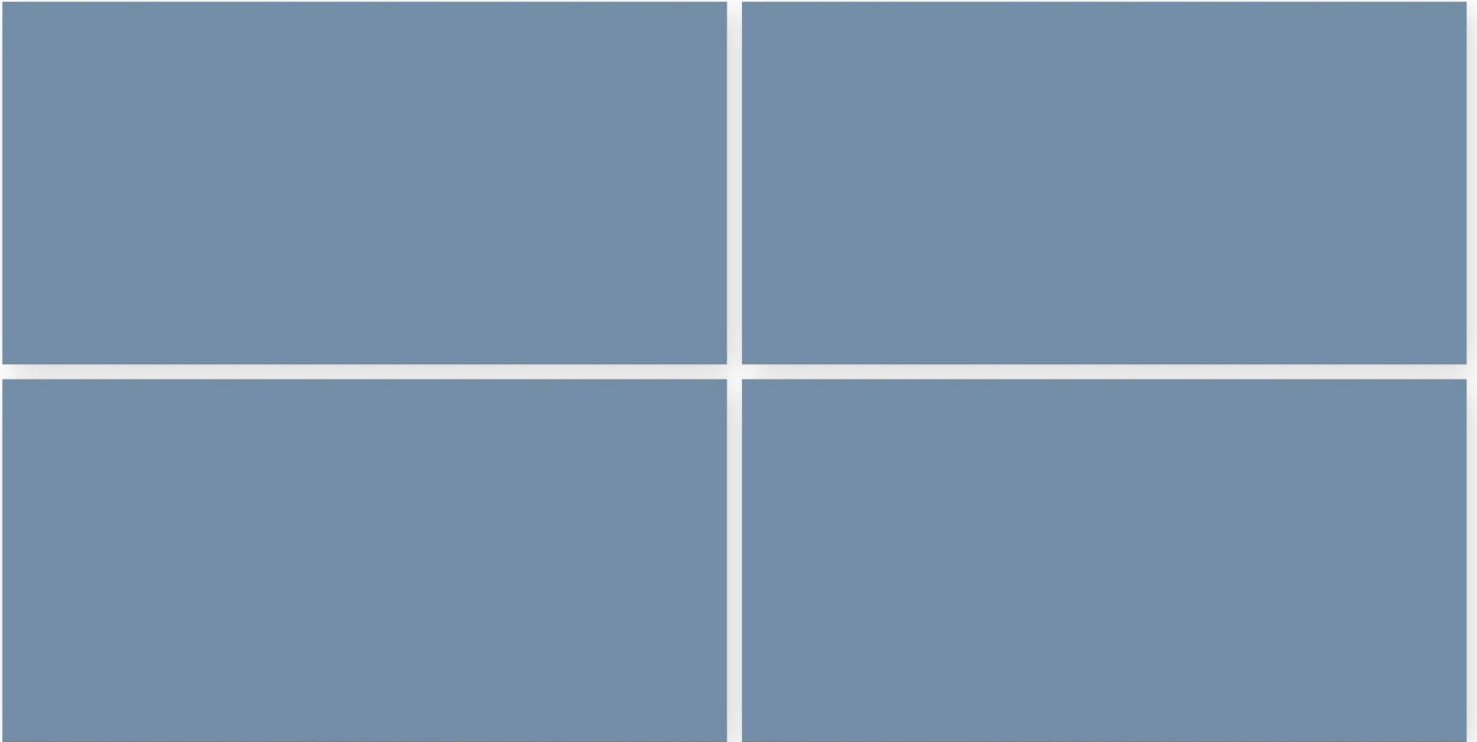


Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

Z BLACK

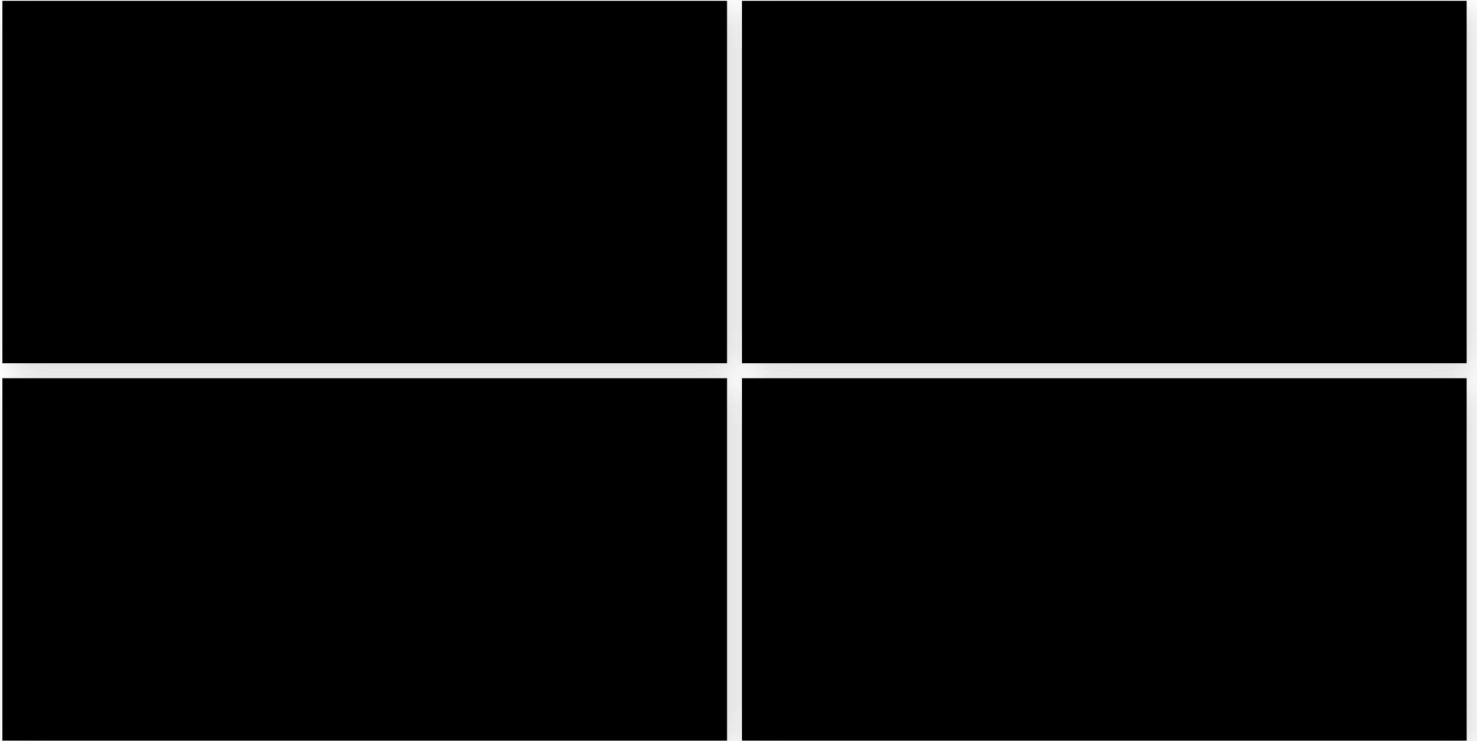

Size : 600 X 1200 MM

Surface : Crayon(Glossy / Matt)

Random : 1

TECHNICAL SPECIFICATION

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 15006/EN 176 GROUP B1a	VALUE
DIMENSION & SURFACE QUALITY			
Deviation in length	ISO-10545-2	± 0.6%	± 0.2%
Deviation in Thickness	ISO-10545-2	± 5%	± 3%
Straight of Sides	ISO-10545-2	± 0.5%	± 0.2%
Rectangularity	ISO-10545-2	± 0.5%	± 0.2%
Surface Flatness	ISO-10545-2	± 0.5%	± 0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	< 0.50%	< 0.04%
Mohs Hardness	EN-101	Min.5	Min.5
Flexural Strength	ISO-10545-4	> 35N/mm ²	⁸ > 40N/mm ²
Skid Resistance (Friction Coefficient)	ISO-10545-17	> 0.4	> 0.4
Breaking Strength	ISO-10545-11	> 1113N	> 1 00N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Noisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	Abrasion class shall be specified by the manufacturer	PIE IV
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	⁸ No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

PACKING DETAILS

Dimension (MM)	BOX			
	PIECES	Sq. Mtr.	Sq. Feet	Weight (Apx.)
600X1200MM	2	1.44	15.50	27.5 Kgs.

NEON TILE

NEON TILE LLP

Corporate Office, Siromany
Business Centre, B/H Real Plaza,
8-A N/H, Morbi.

www.neontile.in

info@neontile.com

Mo. 82382 31831

THANK YOU